

Technical Specifications (continued)

Electrical Characteristics

Input Voltage:

120-277V

Power Factor:

>0.9

Operating Frequency:

50 / 60 Hz

Input Current @ 120V:

84mA

Input Current @ 277V:

35mA

THDi:

≤25%

Listings

UL Recognized:

Yes

UL Classified:

Yes


NSF Listing:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones

CEC Status:

Lawful for sale in California

Dimensions

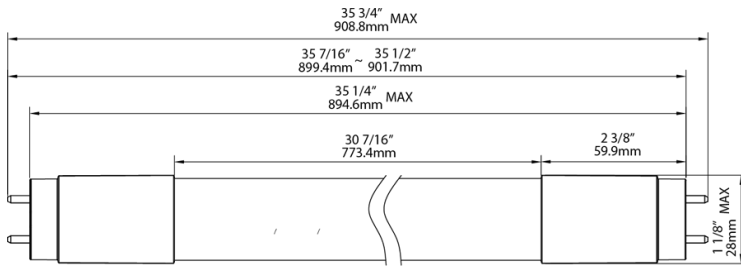

Features

FLUORESCENT REPLACEMENT - Replace conventional fluorescent T8 and T12 linear tubes

EASY TO INSTALL - Simply cut the ballast out, and rewire sockets directly to line voltage

SAVE ENERGY AND MONEY - Provides same output as fluorescent but uses far less energy

SAVE ENERGY AND MONEY - Provides same output as fluorescent but uses far less energy

ENCLOSED FIXTURE RATED - May be used in enclosed and open fixtures

DIFFUSION COATING - Will maintain the same light quality over time and won't yellow, shrink, or wrinkle

BALLAST BYPASS - Internal driver eliminates the need for external ballasts or drivers

INSTANT ON - No warmup time required, full brightness instantly

LOW FLICKER - Less than 5% flicker

MERCURY FREE - Environmentally friendly vs fluorescent technologies

SHUNTED AND NON-SHUNTED - Works on shunted and non-shunted sockets

SINGLE OR DOUBLE-ENDED WIRING - Can be wired using either single-ended or double-ended method for maximum flexibility