


Project:	Type:	Prepared By:	Date:
-----------------	--------------	---------------------	--------------



UPC: 0192552005296

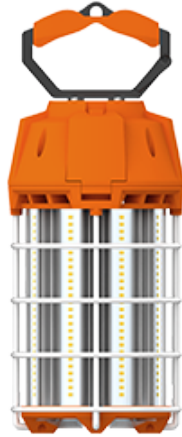

Features and Benefits

- Impact resistant, can handle demanding construction site environments
- Omni-directional light distribution
- Lightweight design with high output
- US Cord and Plug, linkable up to 6 units
- IP64 Water and Dust resistant
- 6kV surge protection built in
- 50,000 hour Lifespan
- 120V
- Meets OSHA Compliance Standard 1915.82(b) for Temporary Lighting: 30-foot spacing for minimum of 5 foot candles
- 5 Year No Compromise Warranty

Technical Specifications

Performance

Product Type:

HID

Input Wattage:

150W

Typical Lumen Output:

18000lm

Efficacy:

120 lm/W

CRI:

>80

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Dimmable:

Yes

Compliance

UL Listed:

Suitable for damp locations

Enclosed Fixtures:

Suitable for use in enclosed fixtures

DLC Model Number:

H10078(TEMP-150-850/35CP)

LED Characteristics

Color Temperature:

5000K

Construction

Bulb Shape:

Work light

Base Type:

Plug

Endcap Material:

Metal

Enclosure Material:

Polycarbonate

Beam Angle:

360°

Electrical

Power Factor:

>0.9

Technical Specifications (continued)

Electrical

Operating Temperature:

-30°C - 60°C

Input Voltage:

120V

Operating Frequency:

60 Hz

Electrical Characteristics

THD:

<20%

Flicker:

<30%

Installation

Installation Orientation:

Vertical

Other

Warranty (Years):

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	4	19.7	14.3	19.7
PALLET	18	40.2	44.3	48

Dimension

