



Replace existing T8 U-Bend fluorescent glass tubes. Square design provides uniform light distribution.

Color: White

Weight: 0.9 lbs

Project:	Type:
Prepared By:	Date:

Driver Info	LED Info
Watts: 15W	Input Voltage: Ballast Dependent
Color Temp: 4000K (Cool White)	Power Factor: Ballast Dependent
Lumens: 2,200	Flicker: N/A
Efficacy: 147 LPW	THDi: <20%
Color Accuracy: 82 CRI	
L70 Accuracy: 50,000	

Technical Specifications

Listings

UL Listed:

Yes

NSF:

Complies with NSF

FCC:

Yes

Rohs:

Yes

CEC Status:

Lawful for sale in California

DLC Qualified:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.
DLC Product Code: PCMPUEKD

Description

Lamp Type:

Linear U-Bend

Bulb Type:

U-Bent

Base Type:

G13, Medium Bipin

Dimmable:

No

Length:

U6

Material:

Glass

LED Characteristics

Installation Type:

Type A, Plug and Play

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

22.6"

MOD (inches):

1.02"

Other

Equivalent:

32W Fluorescent U-Bent

Warranty:

5 years

Optical

Beam Angle:

240°

Shipping Information

Case Qty:

12

Case Dimensions:

24.02 x 15.55 x 8.86


Pallet Quantity of Pieces:

192

Pallet Dimensions:

47.24 x 39.37 x 40.16

Dimensions

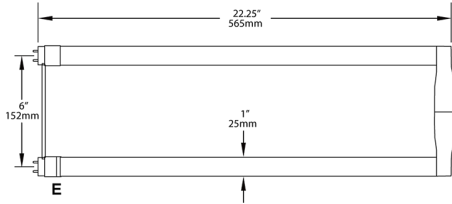

Features

Replacement for conventional Fluorescent T8 U-bends

Plug and Play, no rewiring, no tools, no instructions

Compatible with most commercial ballasts, refer to our published compatibility guide

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient than Standard T8 Lamps

Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle