



Compact ceiling mount fixture: 7, 9, 13, or 14 Watt fluorescent. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor. Lamp supplied.

Color: N/A

Weight: 2.6 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

<b>Lamp Info</b>		<b>Ballast Info</b>	
Type:	9W Quad	Type:	NPF 120V
Watts:	9W	120V:	0.14A
Shape/Size:	N/A	208V:	N/A
Base:	N/A	240V:	N/A
ANSI:	N/A	277V:	N/A
Hours:	10,000	Input Watts:	10W
Lamp Lumens:	525	Efficiency:	90%
Efficacy:	53 LPW		

**Technical Specifications**

**Listings**

**UL Listing:**

Suitable for wet locations. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

**Electrical**

**Sockets:**

Plug-in type, thermoplastic.

**Photocell:**

Button Photocell requires mounting back box. Product number VAN1BB.

**Optical**

**Reflector:**

Injection molded polycarbonate, designed for maximum structural strength.

**Construction**

**Screws:**

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver .

**Reflectors / Backplate:**

Heavy gauge cold rolled steel with high reflectance baked white enamel.

**Lens:**

Clear.

**Ballast Minimum Starting Temperature:**

14 ° F.

**Other**

**Country of Origin:**

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

**Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

**Recovery Act (ARRA) Compliant:**

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).


**Trade Agreements Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

**GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.

## Dimensions

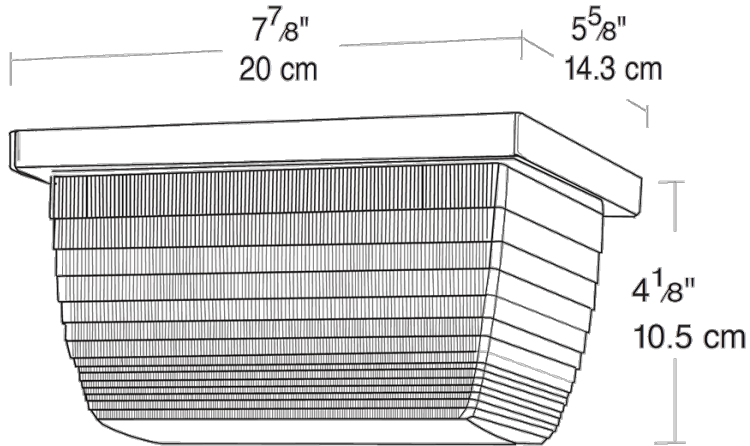

## Features

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Tough polycarbonate refractors

Back boxes available for conduit entry