

product

Compact ceiling mount fixture: 7, 9, 13, or 14 Watt fluorescent. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor. Lamp supplied.

Color: N/A

Weight: 2.6 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

**Lamp Info**

Type: 9W Quad  
 Watts: 9W  
 Shape/Size: N/A  
 Base: N/A  
 ANSI: N/A  
 Hours: 10,000  
 Lamp Lumens: 525  
 Efficacy: 53 LPW

**Ballast Info**

Type: NPF 120V  
 Watts: 0.14A  
 Voltage: 208V  
 240V: N/A  
 277V: N/A  
 Input Watts: 10W  
 Efficiency: 90%

## Technical Specifications

**Listings**

**UL Listing:**

Suitable for wet locations. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

**Electrical**

**Sockets:**

Plug-in type, thermoplastic.

**Photocell:**

Button Photocell requires mounting back box. Product number VAN1BB.

**Optical**

**Refractor:**

Injection molded polycarbonate, designed for maximum structural strength.

**Construction**

**Screws:**

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver .

**Reflectors / Backplate:**

Heavy gauge cold rolled steel with high reflectance baked white enamel.

**Lens:**

White.

**Ballast Minimum Starting Temperature:**

14 ° F.

**Other**

**Country of Origin:**

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

**Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

**Recovery Act (ARRA) Compliant:**

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

**Trade Agreements Act Compliant:**


This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

**GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.

# VAN1F9W

## Dimensions

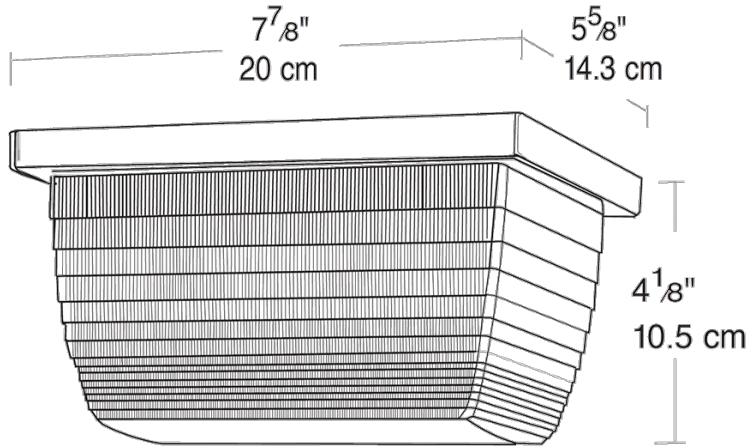

## Features

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Tough polycarbonate refractors

Back boxes available for conduit entry