

product

Sensor controlled Vandalproof fixtures. VAN 3 up to 42 Watts CFL. VAN5 up to 96 Watts CFL, VAN6 up to 26 Watts CFL @ 120v. Sensor color matched to fixture. Sensor is not vandalproof. Lamp supplied.

Color: Bronze

Weight: 10.5 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

**Lamp Info**

Type: 2-42W Triple  
 Watts: 84W  
 Shape/Size: N/A  
 Base: N/A  
 ANSI: N/A  
 Hours: 12,000  
 Lamp Lumens: 6,400  
 Efficacy: 69 LPW

**Ballast Info**

Type: Electronic QT  
 120V: 0.78A  
 208V: N/A  
 240V: N/A  
 277V: N/A  
 Input Watts: 93W  
 Efficiency: 90%

**Technical Specifications**

**Listings**

**UL Listing:**

Suitable for wet locations.

**Electrical**

**Voltage:**

120 volts AC 60 Hz.

**Surge Protection:**

Withstands up to 3000 volts.

**Manual Override:**

Double flip wall switch logic prevents activation by short power outages. Resets after 8 hours. No extra wiring needed.

**Sensor Characteristics**

**Time Adjustment:**

5 seconds to 15 minutes CFL lamps have longer life if Time Adjustment is set to > 7 minutes.

**Quick Test Time:**

5 seconds test time for fast installation. Works day or night.

**Other**

**"No Hands" Auto Testing:**

Auto mode starts after 4 minutes of testing. No adjustment needed.

**Sensor Case Construction:**

Precision molded Lexan.

**Photocontrol:**

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications. Please specify voltage.

**Patents:**

Pat. D547,484.

**Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

**Recovery Act (ARRA) Compliant:**

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

**Trade Agreements Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

**GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.

**Construction**

**Vandal Resistant Lens:**

Hard lens resists vandalism.

**Built for Severe Conditions:**

Double weatherproofing for long life.

**Min Start Temp:**

0°F.

**Ballast Minimum Starting Temperature:**


0°F.

**LED Characteristics**

**LED Detection Indicator:**

Glows red day and night for "on-guard" deterrence.

## Dimensions

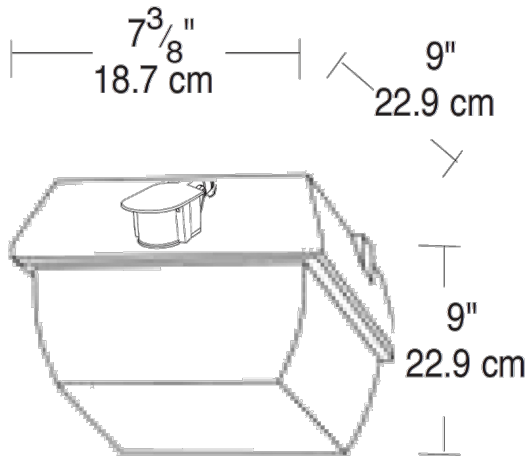

## Features

- Precision die cast aluminum housing with durable polyester powder coating
- Cutoff and standard Wallpacks
- LED "on guard" indicator
- Can be wired in parallel
- Adjustable mini sensor with 180 detection patterned
- Sensor color matches fixture
- Vandal proof fixtures offer sensor controlled compact fluorescent up to 96 Watts