



Versatile wall and ceiling fixture in 13 and 26 Watt fluorescent. Housing is die cast aluminum bronze finish with clear vandalproof polycarbonate refractor. Photocell & sensor models available. Lamp supplied.

Color: N/A

Weight: 5.1 lbs

|                     |              |
|---------------------|--------------|
| <b>Project:</b>     | <b>Type:</b> |
| <b>Prepared By:</b> | <b>Date:</b> |

| Lamp Info    |            | Ballast Info |          |
|--------------|------------|--------------|----------|
| Type:        | 2-13w Twin | Type:        | NPF 120V |
| Watts:       | 26W        | 120V:        | .3/.3A   |
| Shape/Size:  | N/A        | 208V:        | N/A      |
| Base:        | N/A        | 240V:        | N/A      |
| ANSI:        | N/A        | 277V:        | N/A      |
| Hours:       | 10,000     | Input Watts: | 32W      |
| Lamp Lumens: | 1,800      | Efficiency:  | 81%      |
| Efficacy:    | 56 LPW     |              |          |

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

### Electrical

#### Sockets:

HPS Medium base 4kv Pulse Rated Glazed porcelain CFL Plug-in type, thermoplastic.

#### HID Quartz restrike:

Add suffix "/QR" to Van3 (50w restrike) or Van5 (100w restrike) for HOT restrike. Provides immediate illumination in case of momentary power failure.

#### Photocell:

Button Photocell 120V included. Photocell is only compatible with 120V.

### Optical

#### Refractor:

Injection molded polycarbonate, designed for maximum structural strength.

### Construction

#### Housings:

Die cast aluminum with powder coat bronze or white finish.

#### Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER).

#### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel.

#### Ballast Minimum Starting Temperature:

32°F.

### Other

#### Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

### Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).


### Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

### GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

## Dimensions

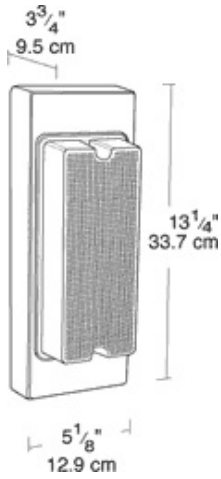

## Features

- Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied
- Tough polycarbonate refractor
- Die cast aluminum housings