



Ultra-economy wall pack with a sleek, contemporary look.

Color: Bronze

Weight: 6.2 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Driver Info

Type	Constant Current
120V	0.46A
208V	0.24A
240V	0.21A
277V	0.20A
Input Watts	51.69W

### LED Info

Watts	50W
Color Temp	4000K (Neutral)
Color Accuracy	84 CRI
L70 Lifespan	50,000 Hours
Lumens	5,917
Efficacy	114.5 lm/W

## Technical Specifications

### Compliance

#### UL Listed:

Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.46A, 208V: 0.24A, 240V: 0.21A, 277V: 0.20A

#### THD:

11.55% at 120V, 9.44% at 277V

#### Power Factor:

99% at 120V, 97% at 277V

#### Surge Protection:

2.5kV

### Note:

All values are typical (tolerance +/- 10%)

### Photocell:

120-277V Button photocell included. Photocell is compatible with 120V-277V.

### Performance

#### Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Construction

#### Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

#### Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

#### Mounting:

Housing contains two (2) conduit entry points, one on each side, and knockout pattern for junction box or direct wall mounting.

#### Lens:

Glass

## Technical Specifications (continued)

### Construction

#### Gaskets:

High-temperature silicone

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### Finish:

Formulated for high durability and long-lasting color

### Other

#### Replacement:

Replaces up to 175W Metal Halide

#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


#### Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

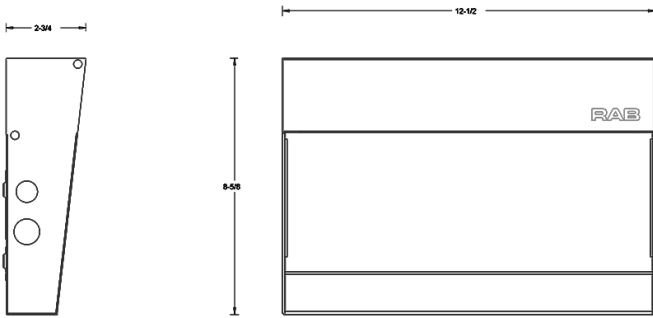

## Features

- Ultra-economy wall pack with a sleek, contemporary look
- Covers footprint of medium-sized HID wall packs
- Available in various lumen packages

## Ordering Matrix

Family	Lumen Package	Color Temp	Options
W17	55L	N	/PCU
	30L = Small (2900lm, 30W) 36L = Small (3600lm, 33W) 55L = Medium (5500lm, 50W) 75L = Medium (7500lm, 69W) 90L = Medium (9000lm, 86W) 150L = Large (15000lm, 139W)	Blank = 5000K (Cool) N = 4000K (Neutral) Y = 3000K (Warm)	Blank = No Option /PCU = 120-277V Button Photocell