WP2FCF32/E1/PC





Technical Specifications

Electrical

Emergency Battery Backup:

Bodine "Coldpak" will operate the CFL lamp for 90 minutes if power fails. Rated -20°C to 55°C. Battery is a maintenance free NiCad with 7 - 10 year life. Wired for 120V.

Photocell:

120V Button Photocell Included. Photocell is only compatible with 120V.

Listings


UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

Construction

Housing:

Die cast aluminum, 1/2" NPS tapped holes top, both sides and back for conduit or photocontrol. Hinged refractor frame. Continuous silicone rubber gasket.

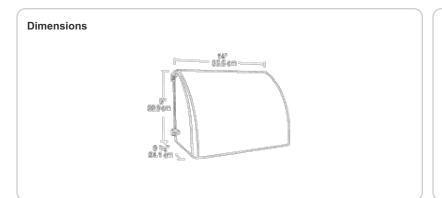

Project:		Туре:	
Prepared By:		Date:	
Lamp Info		Ballast Info	
Туре:	32w Triple	Type:	Elec HPF QT
Watts:	32W	120V:	0.31A
Shape/Size:	N/A	208V:	N/A
Base:	N/A	240V:	N/A
ANSI:	N/A	277V:	N/A
Hours:	12,000	Input Watts:	32W

Other

2,400

75 LPW

Lamp Lumens:

Efficacy:

Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

Features

Emergency battery backup meets NEC requirement

Test button for required maintenance checks

Indicator light illuminates when charging

Maintenance free NiCad battery has 7-10 year life

Hinged door frame opens and remains captive for easy relamping

Silicone gasket remains in place during relamping

Long life lamp included

Reflector:

Cutoff Lens:

Tempered glass.

Finish:

Optical

Refractor:

distance between fixtures.

Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes

Our environmentally friendly polyester powder coatings

Prismatic optics designed to minimize glare and throw

light down and out. Heat resistant borosilicate glass.

are formulated for high-durability and long-lasting

color, and contains no VOC or toxic heavy metals.