## HAYBAY100/D10/LC





Haybay's modular design creates a world of flexibility by keeping your base price low and letting you choose specific options like reflectors, motion sensors and emergency batteries separately.

Color: White Weight: 15.7 lbs

Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Type:	Constant Current	Watts:	100W
120V:	0.87A	Color Temp:	5000K
208V:	0.52A	Color Accuracy:	74 CRI
240V:	0.45A	L70 Lifespan:	100000
277V:	0.37A	Lumens:	10955
Input Watts:	103W	Efficacy:	107 LPW
Efficiency:	97%		

## **Technical Specifications**

## Lightcloud

#### **Lightcloud Installed:**

Lightcloud is a commercial wireless lighting control system and service fully developed and supported by RAB. It's powerful and flexible, yet easy to use and install

#### Listings

#### **UL Listing:**

Suitable for damp locations

## IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

## **DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: P9MKVB9P

#### Construction

## **Vibration Rating:**

Industry-leading 5G vibration rating per ANSI C136.31.

#### **Cold Weather Starting:**

Minimum starting temperature is -40°C (-40°F)

#### **Ambient Temperature:**

SuitableFor use in 40°C (104°F) ambient temperatures.

## Housing:

Precision die-cast aluminum with sheet metal driver bracket/mounting

#### Mounting:

Heavy-duty 3/4" NPS hook and 6 ft. cord; is also 3/4" pendant mount capable (pendant by others).

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high durability and long-lasting color, and contain no VOC or toxic heavy metals.

## **Green Technology:**

Mercury and UV free. RoHS compliant components.

## **LED Characteristics**

#### LEDs:

Long-life, high-efficiency, surface mount LEDs.

#### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### **Color Uniformity:**

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2015.

## **Electrical**

## Drivers:

Class 2, constant current, 50/60 Hz., 120-277V, 120V: 0.87A, 208V: 0.52A, 240V: 0.45A, 277V: 0.37A

## **Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

#### THD:

2.7% at 120V, 6.5% at 277V

## **Power Factor:**

99.9% at 120V, 99.8% at 277V

#### **Surge Protection:**

4kV

#### Other

## **Reflector Options:**

Clear prismatic acrylic reflectors available in 11" or 8.5" height; frosted prismatic acrylic reflectors available in 11" or 8.5" height; white aluminum reflector available in 5" height. Click to see all reflectors.

#### 5 Yr Limited Warranty:


RAB warrantees fixture operation and paint finish for a period of 5 years.

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

# HAYBAY100/D10/LC



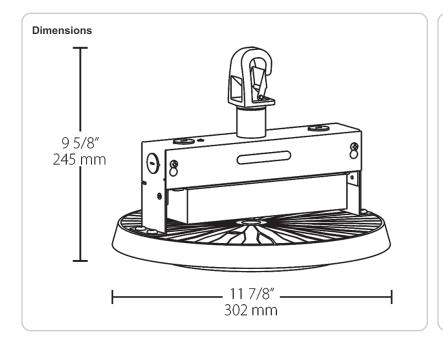

#### **Features**

Simple. Affordable, Modular design.

Open "airflow" design reduces operating temperatures and increases lifespan

Assortment of reflectors tailor the Haybay to specific applications

Available with a Lightcloud Controller, Lightcloud Sensor and other compatible RAB sensors

Ordering Matrix							
Family	Wattage	Color Temp	Driver	Sensor Options	Options		
HAYBA	100		/D10	/LC			
	<b>180</b> = 180W	<b>Blank</b> = 5000K	/D10 = 0-10V Dimming (standard)	Blank = No Sensor	Blank = No Emergency Battery Backup		
	<b>150</b> = 150W	<b>N</b> = 4000K		/LOS = LOSBAY 800 Sensor (base fixture only)	/E2 = Emergency Backup, 120-277V		
	<b>130</b> = 130W			/LOSR = LOSBAY 800 Sensor (requires reflector)			
	<b>100</b> = 100W			/LC = Lightcloud®™ Controller			
				/LCS = Lightcloud®™ Sensor (base fixture only)			
				/LCSR = Lightcloud®™ Sensor (requires reflector)			