SQB1W





Project: Type:

Prepared By: Date:

Mini Sensor and 75w or double 75w quartz bullet floods. Quartz Bullet has silicone O-ring gasket, thick tempered glass lens, internal and external cooling fins. Gold plated socket contacts and 250°C Teflon coated wires for extended lamp life. Lamp supplied.

Color: White

# **Technical Specifications**

## Listings

#### **UL Listing:**

Suitable for wet locations.

#### Optical

#### Lamp:

75W T4 Bipin Lamp included.

#### **Electrical**

#### Socket:

GY8.

#### **Switching Capacity:**

500 watts Incandescent or 100 watts Fluorescent at 120 volts.

# Voltage:

120 volts AC, 60Hz

## **Surge Protection:**

Withstands up to 3000 volts

## RF Immunity:

Weight: 2.1 lbs

Circuits fully shielded for maximum radio frequency immunity.

## Other

#### **Detection Zone:**

Full 180 degrees by 30'.

#### "No Hands" Auto Testing:

Auto mode starts after 4 minutes of testing. No adjustment needed.

## **Photoelectric Control:**

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications.

#### Manually Override:

Double flip wall switch logic prevents activation by short power outages. Resets after 6 hours. No extra wiring needed.

#### Patents:

RAB sensor fixture designs are protected under U.S. and international intellectual property laws.

#### **Sensor Characteristics**

#### **Quick Test Time:**

5 seconds test time for fast installation. Works day or night.

#### Time Adjustment:

5 seconds to 15 minutes.

#### Construction

# Vandal Resistant Lens:

Hard lens resists vandalism.

#### **Case Construction:**

Precision molded Lexan.

#### **Built for Severe Conditions:**

Double weatherproofing for long life.


#### **LED Characteristics**

## **LED Detection Indicator:**

Glows red day and night for "on-guard" deterrence.

# SQB1W



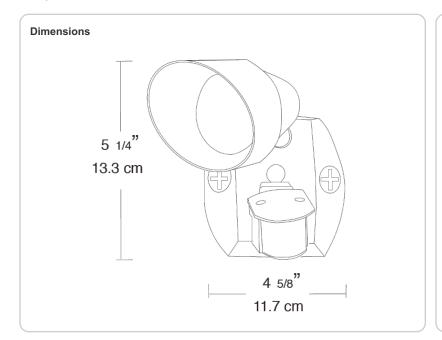

## Features

- Surge protected
- 180° detection pattern
- Quick installation with 5 second test time and auto test logic
- LED "on guard" indicator
- Protected manual override with auto reset after 8 hours or at dawn