



LED roadway lighting that's easy to buy. Free trial program and leasing options make it easy to get started with LED. Specification-grade optics deliver efficient, clean, uniform light distributions at a reasonable cost. Optics are factory installed and meet IES Lateral Distribution Type IV. LROAD™ 125W replaces 350W metal halide roadway fixtures.

Color: Gray

Weight: 32.0 lbs

|                     |              |
|---------------------|--------------|
| <b>Project:</b>     | <b>Type:</b> |
| <b>Prepared By:</b> | <b>Date:</b> |

| Driver Info  |                  | LED Info        |        |
|--------------|------------------|-----------------|--------|
| Type:        | Constant Current | Watts:          | 125W   |
| 120V:        | 1.12A            | Color Temp:     | 4000K  |
| 208V:        | 0.70A            | Color Accuracy: | 82 CRI |
| 240V:        | 0.61A            | L70 Lifespan:   | 100000 |
| 277V:        | 0.52A            | Lumens:         | 10,952 |
| Input Watts: | 137W             | Efficacy:       | 80 LPW |
| Efficiency:  | 91%              |                 |        |

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations as a downlight.

#### IESNA LM-79 & IESNA LM-80 Testing:

RAB LED fixtures have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

#### Dark Sky Approved:

The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.

### Optical

#### Lumen Maintenance:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### BUG Rating:

B1 U0 G2

### Construction

#### IES Classification:

The Type IV distribution (also known as a Forward Throw) is especially suited for illuminating the perimeter of parking areas and for intersections. It produces a semicircular distribution with essentially the same candpower at lateral angles from 90° to 270°.

#### Effective Projected Area:

EPA = 2.2

#### IP Rating:

Ingress Protection rating of IP66 for dust and water.

#### Vibration Rating:

Industry-leading 5G vibration rating per ANSI C136.31.

#### Ambient Temperature:

Suitable for use in 40°C ambient temperatures.

#### Cold Weather Starting:

The minimum starting temperature is -40°C/-40°F

#### Thermal Management:

Superior patent pending thermal management design with external Air-Flow fins provides maximum operational life, even in high ambient temperature environments.

#### Housing:

Die cast aluminum housing, lens frame and mounting arm.

#### Mounting:

Slipfitter with 180° pivot available for mounting on 2 3/8" tenon.

#### Recommended Mounting Height:

Up to 35 ft.

#### Reflector:

Specular vacuum-metallized polycarbonate

#### Gaskets:

High temperature silicone gaskets

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

#### Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

### LED Characteristics

#### LEDs:

Multi-chip, high-output, long-life LEDs

#### Color Consistency:

3-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

#### Color Stability:

LED color temperature is warranted to shift no more than 200K in CCT over a 5 year period.

#### Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2011.

### Electrical

#### SPEC>Drivers:

Two Drivers Constant Current, Class 2, 1750mA, 100-277V, 50/60Hz, 1.1A, Power Factor 99%

#### THD:

5.4% at 120V, 15.5% at 277V


#### Surge Protection:

6kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2.

## Technical Specifications (continued)

|   |   |  |
|---|---|--|
| <p><b>Other</b></p> <hr/> <p><b>Equivalency:</b><br/>LROAD™ 125W replaces 350W metal halide</p> <p><b>California Title 24:</b><br/>See RWLED4T125SF/D10, RWLED4T125SF/BL, RWLED4T125SF/PCS, RWLED4T125SF/PCS2, or RWLED4T125SF/PCT for a 2013 California Title 24 compliant product. Any additional component requirements will be listed in the Title 24 section under technical specifications on the product page.</p> <p><b>Patents:</b><br/>The LROAD™ design is protected by patents pending in the U.S., Canada, China, Taiwan and Mexico.</p> | <p><b>Warranty:</b><br/>RAB warrants that our LED products will be free from defects in materials and workmanship for a period of ten (10) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.</p> <p><b>Country of Origin:</b><br/>Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.</p> <p><b>Buy American Act Compliant:</b><br/>This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.</p> | <p><b>Recovery Act (ARRA) Compliant:</b><br/>This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).</p> <p><b>Trade Agreements Act Compliant:</b><br/>This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.</p> <p><b>GSA Schedule:</b><br/>Suitable in accordance with FAR Subpart 25.4.</p> |
|---|---|--|

## Dimensions

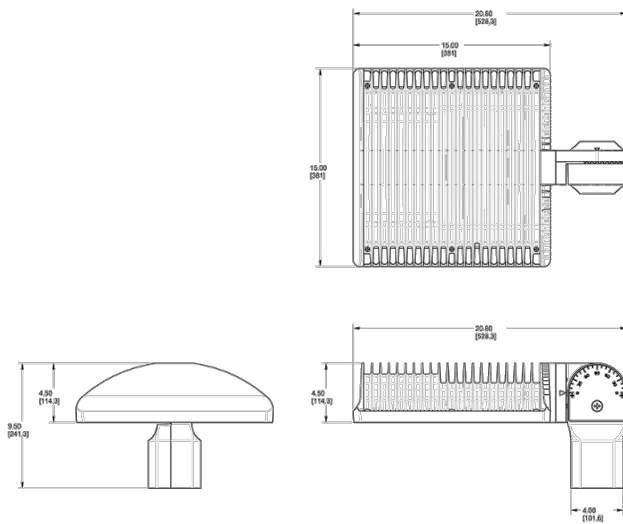

## Features

- Ideal for entrance roadways, collector roads, and single-sided roads
- 27 year lifespan dramatically reduces maintenance and re-lamping costs
- Precision optics deliver maximum downward street side lumens with uniformity and minimal glare
- Industry-leading 5G vibration rating per ANSI C136.31
- Easy-access electrical compartment makes wiring fast and secure
- 10-Year no compromise warranty

## Ordering Matrix

| Family | Distribution | Watts      | Mount           | Color Temp  | Finish                                   | Dimming                               | Voltage                         | Photocell  | Bi-Level                              |
|--------|--------------|------------|-----------------|---|--|---------------------------------------|---------------------------------|--|---------------------------------------|
| RWLED  |              |            |                 |   |  |                                       |                                 |  |                                       |
|        | 4T = Type IV | 125 = 125W | SF = Slipfitter | Blank = 5000K (Cool)<br>Y = 3000K (Warm)<br>N = 4000K (Neutral) | Blank = Bronze<br>W = White<br>RG = Gray | Blank = No Dimming<br>/D10 = Dimmable | Blank = 120-277V<br>/480 = 480V | Blank = No Photocell<br>/PCS = 120V Swivel<br>/PCS2 = 277V Swivel<br>/PCS4 = 480V Swivel | Blank = No Bi-Level<br>/BL = Bi-Level |