

SHARK8- 100YNW/D10/LC



The eight-foot SHARK is available in 70W and 100W versions. This impact-resistant linear LED washdown fixture is ideal for car washes, tunnels, stairwells and other hard-to-reach areas where relamping is difficult and costly.

Color: White

Weight: 25.7 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type:	Constant Current
120V:	0.80A
208V:	0.49A
240V:	0.42A
277V:	0.36A
Input Watts:	95W
Efficiency:	N/A

LED Info

Watts:	100W
Color Temp:	3500K
Color Accuracy:	N/A
L70 Lifespan:	100000
Lumens:	11435
Efficacy:	121 LPW

Technical Specifications

Lightcloud

Lightcloud Installed:

Lightcloud is a commercial wireless lighting control system and service fully developed and supported by RAB. It's powerful and flexible, yet easy to use and install.

Listings

UL Listing:

Suitable for wet locations.

NSF:

NSF Certified by Public Health and Safety

ABS:

Approved for use on mobile offshore drilling units and shipping vessels

NEMA Rating:

4X, protected against corrosion

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

Electrical

Driver:

Class 2 Constant Current, 4kV, 100-277VAC, 50-60Hz, 120V: 0.80A, 208V: 0.49A, 240V: 0.42A, 277V: 0.36A

Surge Protection:

4kV

THD:

7.2% at 120V, 10.9% at 277V

Power Factor:

99.3% at 120V, 94.5% at 277V

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

Construction

IP Rating:

Ingress Protection rating of IP66 for dust and water

Housing:

5VA impact-resistant polycarbonate. 1/2" openings for conduit and bushing/cord entry. Polycarbonate is affected by cleaning agents or other liquids containing partial solvents such as low molecular weight aldehydes and ethers, ketones, esters, aromatic hydrocarbons and perchlorinated hydrocarbons.

Mounting:

Quick-mount, surface, stainless steel spring clips supplied. 4 additional mounting accessory kits available.

Lens:

Diffuse polycarbonate lens for low glare and maximum protection

Gaskets:

EVA silicone foam

Maximum Ambient Temperature:

Suitable for use in 104° F (40°C) ambient temperatures

Cold Weather Starting:

The minimum starting temperature is -22° F (-30° C).

Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

Finish:

Formulated for high-durability and long lasting color.

LED Characteristics

LEDs:

Long-life, high-efficiency surface mounting LEDs

Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

Color Stability:

LED color temperature is warranted to shift no more than 200K in CCT over a 5 year period

Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2015.


Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

SHARK8- 100YNW/D10/LC

Dimensions

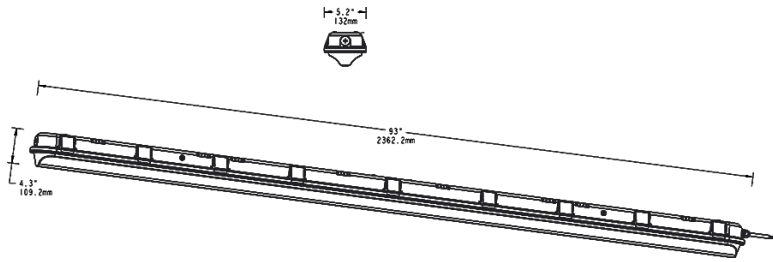

Features

- NSF certified for use in food-preparation facilities
- American Bureau of Shipping (ABS) approved
- Ideal for car washes, tunnels and stairwells
- Mounting options:
 - Chain, junction box, angled surface mount, ceiling mount or vandal-resistant surface mount
- IP66 AND NEMA 4X ratings protect against dust, water ingress & corrosion
- 5-Year, no compromise warranty
- 100,000-Hour LED lifespan
- Built in support Lightcloud_
- Easy setup - simply power on, confirm device connectivity and call 844-LIGHTCLOUD

Ordering Matrix

Family	Length	Watts	Color Temp	Finish	Dimming	Lightcloud
SHARK	8	100	YN	W	/D10	/LC
	8 = 8 ft	100 = 100W 70 = 70W	Blank = 5000K (Cool) N = 4000K (Neutral) YN = 3500K (Warm Neutral) Y = 3000K (Warm)	W = White	D10 = Dimmable	/LC = Lightcloud