

Technical Specifications (continued)

Electrical

Operating Frequency:

50/60Hz

Construction

Material:

Metal

Trim Style:

Smooth Trim

Mounting:

Surface mount

Operating Temperature Range:

-20°C - 40°C (-4°F - 104°F)

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

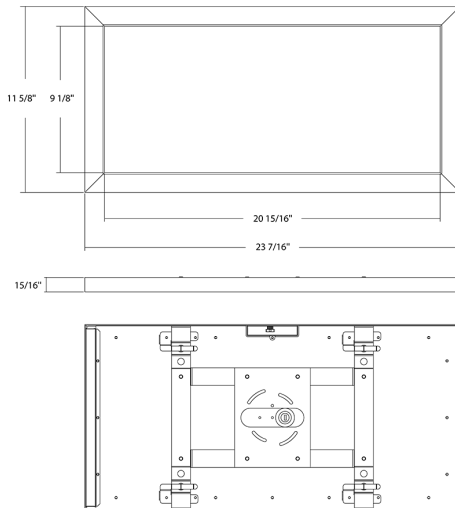

Features

- Select from 5 field-adjustable color temperatures 2700K, 3000K, 3500K, 4000K, or 5000K
- Suitable for indoor applications in dry and damp environments
- Dimmable, see Dimmer Compatibility List
- Meets California Title 24 requirements
- 50,000 life hours
- 5-year, no compromise warranty

Ordering Matrix

| Family | Size | Shape | Wattage | CRI/Color Temp | Voltage/Dimming | Finish |
|--------|------|-------|---------|----------------|-----------------|--------|
| SMPFA | 1X2 | RT | 22 | | UNVT | W |

1X1 = 1' X 1'
 1X2 = 1' X 2'
 1X4 = 1' X 4'
 2X2 = 2' X 2'

RT = Rectangular
 S = Square

20 = 20W
 22 = 22W
 45 = 45W

Blank = 90 CRI, Field Adjustable

UNVT = 120-277V, TRIAC

W = White