

Project:	Туре:
Prepared By:	Date:

Driver Info LED Info Watts: 8W Input Voltage: 100-277V 3000K (Warm Power Factor: 0.9 Color Temp: White) Flicker: N/A Lumens: 960 THDi: <20% Efficacy: 120 LPW Color 82 CRI Accuracy: L70 Accuracy: 50,000

Technical Specifications

Listings

UL Recognized:

Yes

UL Classified:

Yes

Rohs:

Yes

CEC Status:

Lawful for sale in California

DLC Qualified:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from

DLC Member Utilities.
DLC Product Code: PJA55DI5

Description

Lamp Type:

Linear T8

Bulb Type:

T8

Base Type:G13, Medium Bipin

Dimmable:

No

Length:

2ft

Material:

Glass

LED Characteristics

Installation Type:

Type B, Ballast Bypass, Single Ended Wire

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

Bare Lamp Illuminated Length (inches):

23.22"

MOL (inches):

23.5"

MOD (inches):

1.09"

Other

Equivalent:

17W Fluorescent T8

Warranty: 5 years

Optical

D

Beam Angle:

240°

Shipping Information

Case Qty:

25

Case Dimensions:


25.3 x 7.87 x 7.28

Pallet Quantity of Pieces:

1200

Pallet Dimensions:

49.21 x 39.37 x 48.82

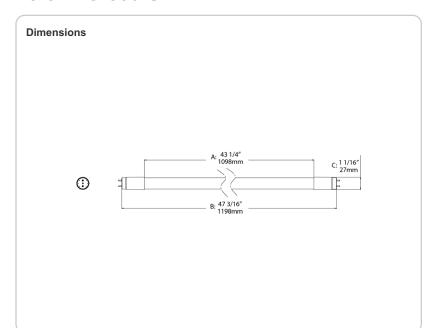

Features

Replacement for conventional Fluorescent T8 or T12 linear tubes
Internal Driver eliminates the need for external ballasts or drivers
Single Ended wiring method works on shunted sockets
Suitable for use in enclosed and open fixtures
Approximately 40% More Energy Efficient that Standard T8 Lamps
Start up instantly, no flicker or hum like conventional fluorescent tubes
Environmentally friendly, no mercury used and are easy to recycle