Technical Specifications

DLC Member Utilities.
DLC Product Code: PBJ9D4OD

Description

Lamp Type:

Bulb Type:

Linear T8

T8



Replace existing fluorescent tubes. Glass and plastic models available.

Color: White Weight: 0.3 lbs

| Project: | Туре: |
|--------------|-------|
| Prepared By: | Date: |

Driver Info LED Info

Watts: 8W Input Voltage: Ballast Dependent Color Temp: 5000K (Daylight) Power Factor: Ballast Dependent

Lumens: 1,200 Flicker: N/A Efficacy: 150 LPW THDi: <20%

Pallet Quantity of Pieces:

Pallet Dimensions:

49.21 x 39.37 x 48.82

Color Accuracy: 82 CRI L70 Accuracy: 50,000

| reclinical opecinications | | |
|--|---|----------------------|
| Listings | Base Type: | MOD (inches): |
| UL Listed: | G13, Medium Bipin | 1.09" |
| Yes | Dimmable: | Other |
| NSF: | No | Equivalent: |
| Complies with NSF | Length: | 25W Fluorescent T8 |
| FCC: | 3ft | Warranty: |
| Yes | Material: | 5 years |
| Rohs: | Glass | Optical |
| Yes | LED Characteristics | Beam Angle: |
| CEC Status: | Installation Type: | 240° |
| Lawful for sale in California | Type A, Plug and Play | Shipping Information |
| DLC Qualified: | Lifespan: | Case Qty: |
| Yes | 50,000-hour LED lifespan based on IES LM-70 results | 25 |
| DLC Listed: | Construction | Case Dimensions: |
| This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from | Operating Temperature: | 37.2 × 7.87 × 7.28 |


Bare Lamp Illuminated Length (inches):

-20 - 40°C

MOL (inches):

35.22"

35.5"

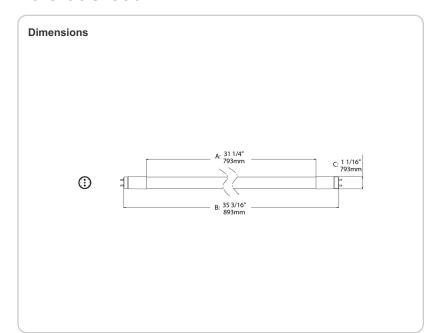

Features

Replacement for conventional Fluorescent T8 linear tubes

Plug and Play, no rewiring, no tools, no instructions

Compatible with most commercial ballasts, refer to our published compatibility guide

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient that Standard T8 Lamps

Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle