



General purpose lighting that's pocket friendly.

Color: Bronze

Weight: 8.0 lbs

Project:

Type:

Prepared By:

Date:

#### Driver Info

| Type        | Constant Current |
|-------------|------------------|
| 120V        | 0.74A            |
| 208V        | 0.42A            |
| 240V        | 0.37A            |
| 277V        | 0.34A            |
| Input Watts | 89.9W            |

#### LED Info

|                |                 |
|----------------|-----------------|
| Watts          | 87W             |
| Color Temp     | 4000K (Neutral) |
| Color Accuracy | 82 CRI          |
| L70 Lifespan   | 50,000 Hours    |
| Lumens         | 11,533          |
| Efficacy       | 128.3 lm/W      |

## Technical Specifications

### Compliance

#### UL Listed:

Suitable for wet locations. Suitable for ground mounting.

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PG2VIXQA

### Electrical

#### Driver:

Constant Current, 120-277V, 50/60 Hz, 120V: 0.74A, 208V: 0.42A, 240V: 0.37A, 277V: 0.34A

#### Dimming Driver:

Driver includes wiring for 0-10V dimming systems. Dim as low as 10%.

#### THD:

3.36% at 120V, 4.56% at 277V

#### Power Factor:

99.7% at 120V, 96.2% at 277V

#### Note:

All values are typical (tolerance +/- 10%)

### Optical

#### NEMA Type:

NEMA Beam Spread of 7H x 7V

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Construction

#### IP Rating:

Ingress protection rating of IP65 for dust and water

#### EPA:

0.9

#### Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

## Technical Specifications (continued)

### Construction

#### Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

#### Housing:

Precision die-cast aluminum

#### Mounting:

Trunnion with tilt angle in 30° increments

#### Lens:

Tempered glass

### Finish:

Formulated for high durability and long-lasting color

### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Performance

#### Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### Other

#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


### Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

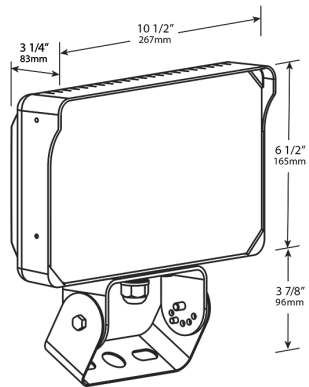

## Features

- Versatile, general-purpose floodlight
- 7H x 7V NEMA distribution
- 0-10V dimming
- IP65 rating protects against dust and water
- 50,000-Hour LED lifespan

## Ordering Matrix

| Family | Lumen Packages (values are nominal)  | Mounting                                      | CRI/Color Temp   | Finish                                    | Driver/Voltage                      |
|--------|--|---|--|---|-------------------------------------|
| X34    | 100L   | T   | -840   |   | /U                                  |
|        | <b>100L</b> = 11,000 Lumens, 87W<br><b>150L</b> = 18,000 Lumens, 130W<br><b>195L</b> = 20,000 Lumens, 160W | <b>SF</b> = Slipfitter<br><b>T</b> = Trunnion | <b>Blank</b> = 80 CRI, 5000K<br><b>-840</b> = 80 CRI, 4000K<br><b>-830</b> = 80 CRI, 3000K | <b>Blank</b> = Bronze<br><b>W</b> = White | <b>/U</b> = 120-277V, 0-10V Dimming |